


FEATURES






- **Highly Customizable:** Several valve and component options
- **Easy Reservoir Draining:** Pump not required for draining.
- **In-Tank Filter System:** Provides easy element replacement without line drainage.
- **Convenient Suction Strainer/ Pump Maintenance:** Can be replaced without draining reservoir or removing lid.
- **Removable Reservoir Lid:** Allows for easy reservoir cleaning. No leaky end bells that make access for cleaning difficult.
- **Conserves Space:** While still allowing easy maintenance, the top mount tank design saves floor space.

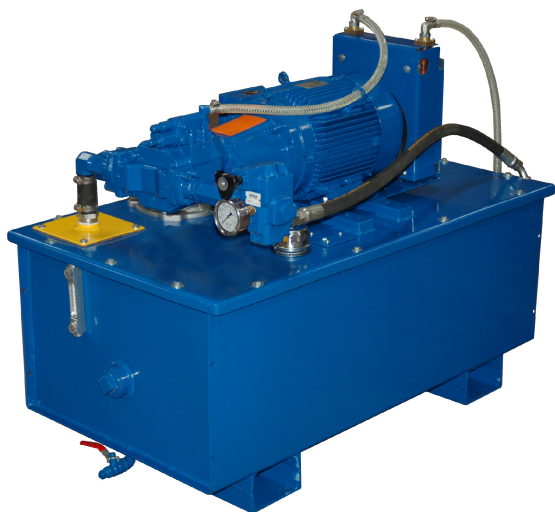

TMT70 SHOWN WITH OPTIONAL HE165H CASE COOLER

ITEM IDENTIFICATION

1. CLEAN-OUT COVER
2. VALVE MOUNTING AREA (OPTIONAL)
3. RETURN FILTER
4. FILLER/ BREATHER
5. SIGHT & TEMPERATURE GAUGE
6. IN-TANK MAGNETS
7. SUCTION STRAINER
8. 1/2" NPT BALL VALVE WITH PLUG
9. PUMP
10. PUMP MOTOR ADAPTER
11. ELECTRIC MOTOR
12. PRESSURE GAUGE WITH SNUBBER
13. HEAT EXCHANGER (OPTIONAL)
14. FLOAT SWITCH (OPTIONAL)
15. TEMPERATURE SWITCH (OPTIONAL)
16. HEATER (OPTIONAL)
17. CASE COOLER (OPTIONAL)

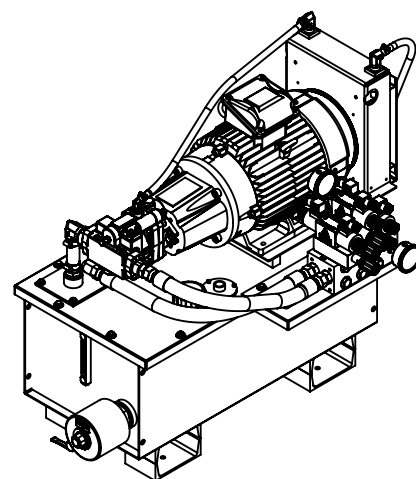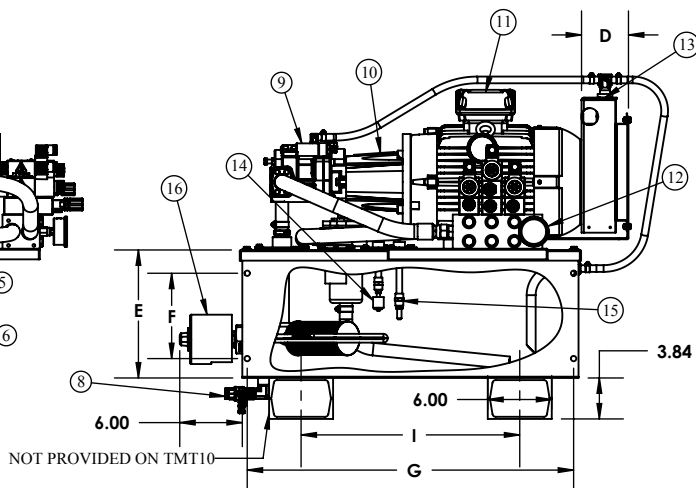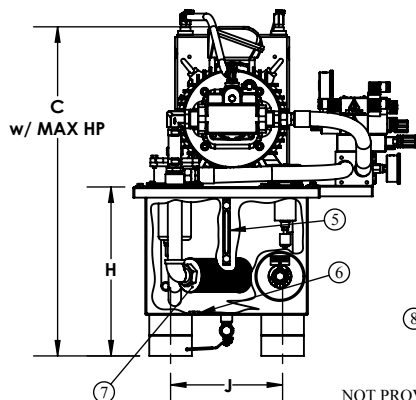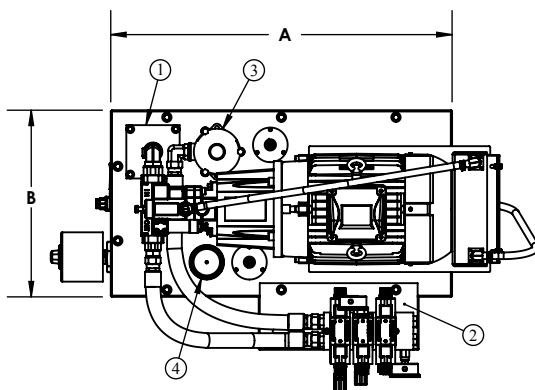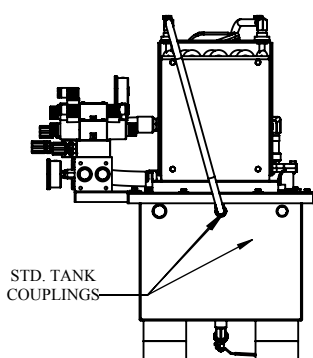

TMT20 - 10HPC3 - PCP8-3K-2AK3 - HE90H
W/ D03 VALVES, FLOAT / TEMP SWITCHES

MODEL NUMBER	RESERVOIR CAPACITY	DIMENSIONS (INCHES)								MOUNTING			STD. RETURN FILTER 10μ	MAX HP RECOMMENDED
		A	B	C	D	E	F	G	H	I	J	Ø		
TMT10	10 GAL.	26.0	15.0	25.1	4.4	10.9	8.0	24.6	12.3	24.6	8.0	.381	ITF200-12FS-10MNPE	5
TMT20	20 GAL.	32.0	17.5	30.1	4.4	12.2	8.0	30.6	15.8	20.5	10.5	.381	ITF200-12FS-10MNPE	10
TMT35	35 GAL.	36.5	22.5	34.9	4.4	13.6	8.0	35.1	17.4	25.0	15.5	.531	ITF250-16FS-10MNPE	15
TMT70	70 GAL.	46.5	26.3	42.5	4.4	16.6	8.0	45.1	20.4	35.0	19.0	.531	ITF425-24FS-10MNPE	50
TMT100	100 GAL.	46.5	26.3	48.0	4.4	22.2	8.0	45.1	25.9	35.0	19.0	.531	ITF425-24FS-10MNPE	50
TMT150	150 GAL.	46.5	26.3	59.0	4.4	34.1	8.0	45.1	36.9	35.0	19.0	.531	E643-766	50